



JCC Payment Systems Ltd.

**Installation User Guide for SafeNet 5110 CC USB
token on Windows**

Step 1: Download installation file

Note: The file download may take a few minutes. It depends of your network speed

- Check your Operating System version. To see if your operating system is 32bit or 64bit, follow the instructions of Microsoft <https://support.microsoft.com/en-gb/help/15056/windows-32-64-bit-faq>.
- Click the following links to download the drivers based on your OS version:
 - Windows 32bit - [SafeNetAuthenticationClient-x32.msi](#)
 - Windows 64bit - [SafeNetAuthenticationClient-x64.msi](#)

If you use different computers (Work, Home, PC, Laptop) it is necessary to install the drivers on each computer before using the USB Token.


Step 2: Install Drivers

Note: Please do not plug in the USB token to your device until the drivers installation is finished


- After you download the driver, run the file by double-clicking it in order to start the installation.




- Click "Next"

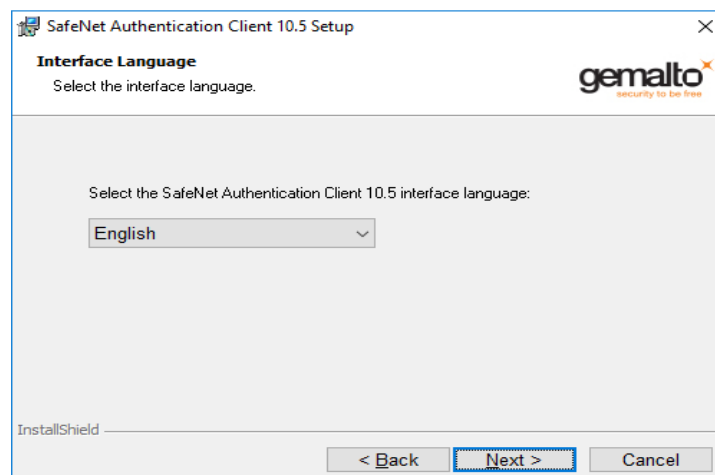


- Choose the Interface Language (preferred “English”) and click “Next”

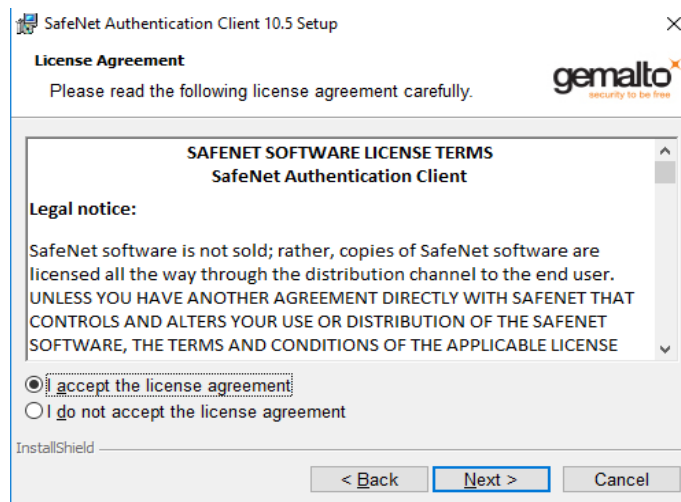


- Choose “I accept the license agreement” and then click on “Next”

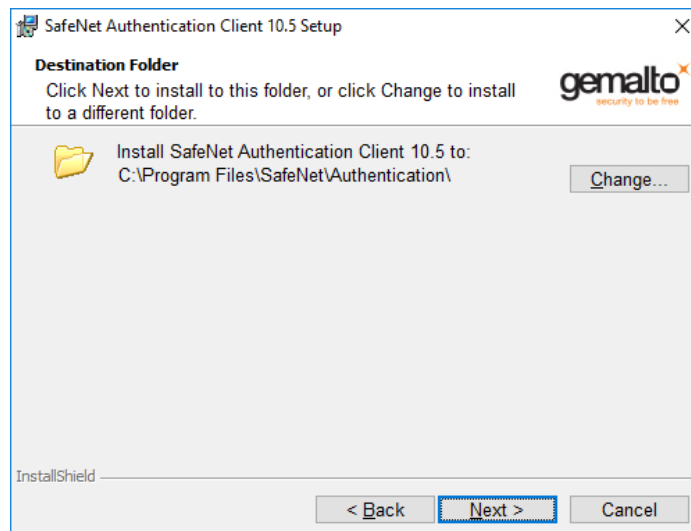


- Leave the default Destination Folder and click “Next”

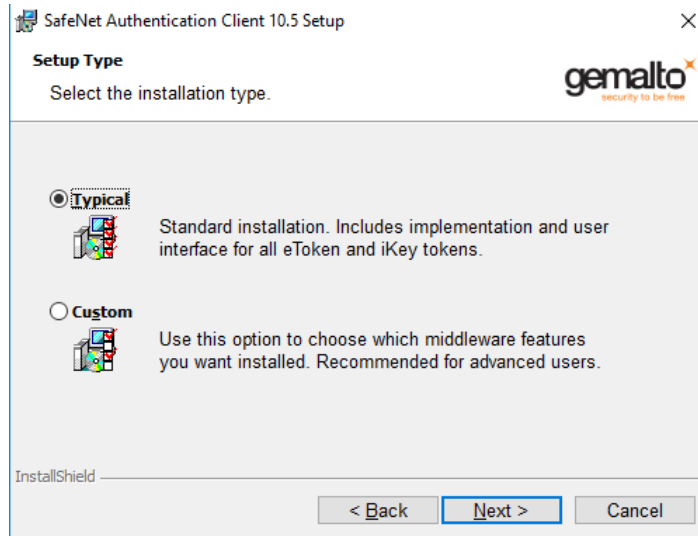

- In the Setup Type choose **“Typical”** and then click on **“Next”**

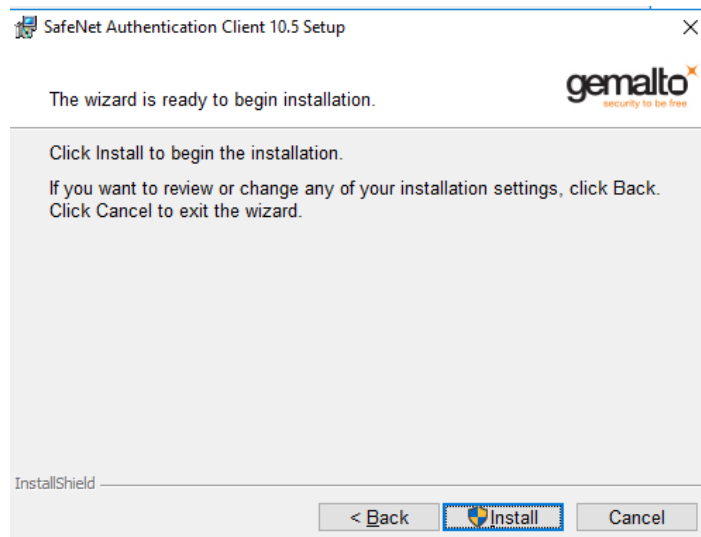


- Click on **“Install”**

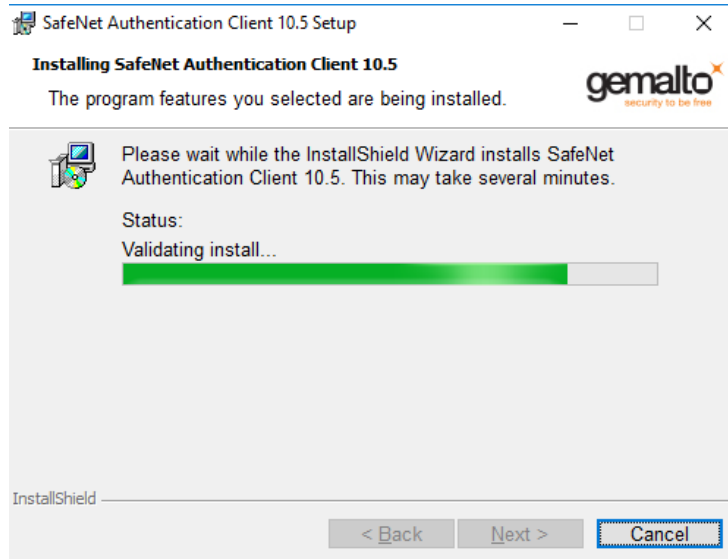


- The Installation may take a few minutes



- Click on “**Finish**” and the installation complete successfully.

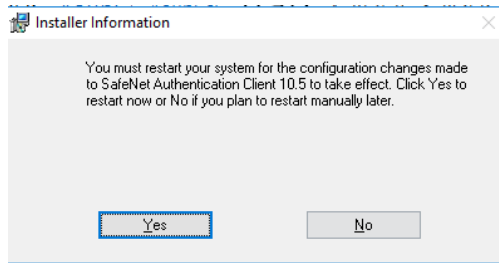

- Click on **“Yes”** to reboot your computer
- Connect the USB token to the USB port of your computer
- You will be prompted to change the default token PIN.
- Type in the default token PIN **“1234567890”** and after that type your personal PIN (and never disclose to anyone)
- Open the Client by going to the Windows menu and choose: Start → Search field → SafeNet → **“SafeNet Authentication Client Tools”**.

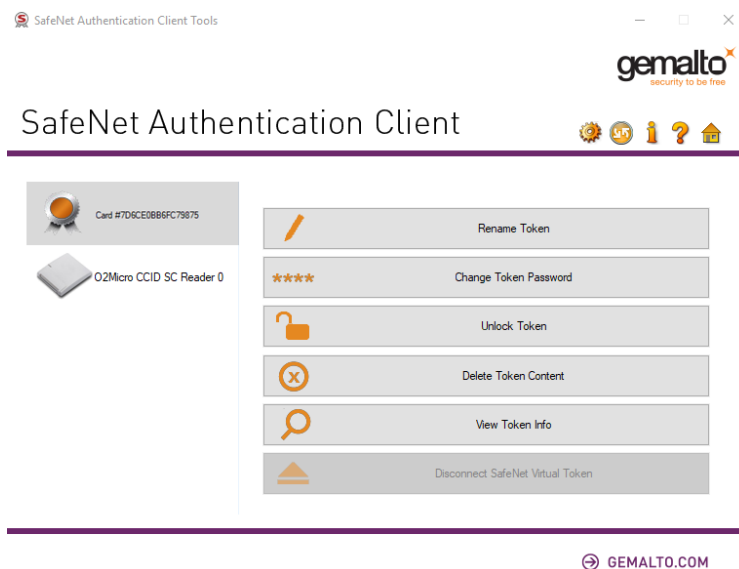

- You should see the serial number of the token on the left top corner